



Product Guide

LED Indoor Lighting

2017-2018H1




DIRECTORY

Downlight	01P-06P
Panel Light	07P-08P
Troffer Fixtures	09P
Flush Mount	10P-19P
Vanity Light	20P
Undercabinet Light	21P
Strip Light	22P-25P
Wrap Light	26P-29P
Shop Light	30P
Vapor Tight	31P
Work Light	32P-36P



ECO Residential Downlight

Commercial Downlight

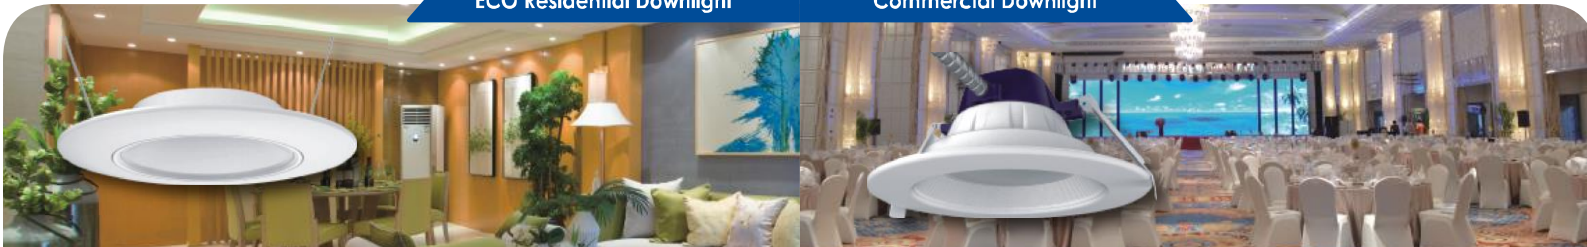


Features

- Life Time: >50,000 hours
- Color Temperature: 3000K/4000K/5000K
- Aluminum housing, solid and durable, excellent heat dissipating effect




Dimensions



Applications

- Commercial
- Healthcare
- Education
- Hospitality
- Residential
- Retail
- Conference Room

Light Distribution



Item	Length	Height
MQTL1084 8W 4"	5.04in	1.57in
MQTL1084-10W-6"	7.31in	1.38in
MQTL1084-8W-6"	7.31in	1.38in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MQTL1084 8W 4"	120V	8W	>0.7	Y	550lm	69lm/W	3000K/4000K/5000K	RA>80	>50,000H
MQTL1084 10W 6"	120V	10W	>0.7	Y	750lm	75lm/W	3000K/4000K/5000K	RA>80	>50,000H
MQTL1084 18W 6"	120V	18W	>0.7	Y	1200lm	66lm/W	3000K/4000K/5000K	RA>80	>50,000H

Features

- Life Time: >50,000 hours
- Color Temperature: 3000K/4000K/5000K
- Aluminum housing, solid and durable, excellent heat dissipating effect




Dimensions



Applications

- Commercial
- Healthcare
- Education
- Hospitality
- Residential
- Retail
- Conference Room

Light Distribution




Item	Length	Height
MQTL1085 13W 4"	5.91in	3.19in
MQTL1085-13W-6"	8.2in	3.70in
MQTL1085-20W-6"	8.2in	3.70in
MQTL1085 20W 8"	10.24in	4.02in
MQTL1085-30W-8"	10.24in	4.02in
MQTL1085-40W-10"	11.30in	4.53in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MQTL1085 13W 4"	130 277V	13W	>0.9	Y	1100lm	85lm/W	3300K/4000K/5000K	RA>80	>50,000H
MQTL1085 13W 6"	130 277V	13W	>0.9	Y	1100lm	85lm/W	3300K/4000K/5000K	RA>80	>50,000H
MQTL1085 20W 6"	130 277V	20W	>0.9	Y	1800lm	90lm/W	3300K/4000K/5000K	RA>80	>50,000H
MQTL1085 20W 8"	130 277V	20W	>0.9	Y	1800lm	90lm/W	3300K/4000K/5000K	RA>80	>50,000H
MQTL1085 30W 8"	130 277V	30W	>0.9	Y	2500lm	83lm/W	3300K/4000K/5000K	RA>80	>50,000H
MQTL1085 40W 10"	130 277V	40W	>0.9	Y	3500lm	88lm/W	3300K/4000K/5000K	RA>80	>50,000H

Slim Downlight

4"LED Downlight

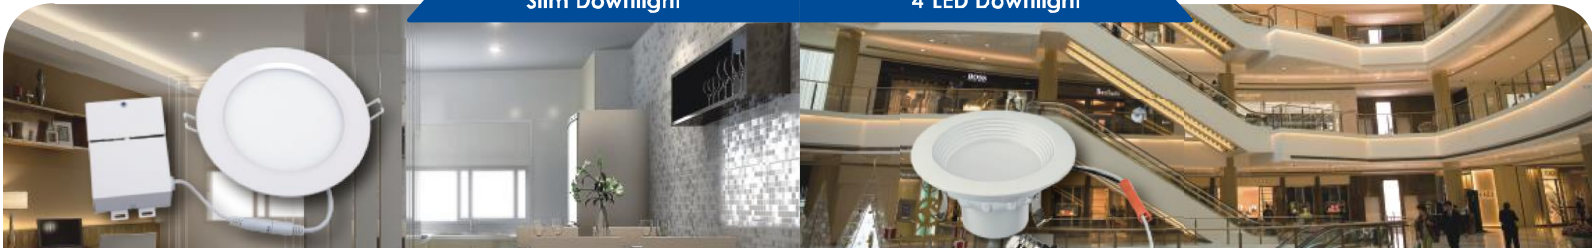


Features

- Life Time: > 50,000 hours
- Color Temperature: 3000K/4000K/5000K
- Aluminum housing, solid and durable, excellent heat dissipating effect




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
MQTL1070 4"	4.72in	0.96in
MQTL1070 6"	6.77in	0.96in
MQTL1070 8"	9.13in	0.96in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MQTL1070 4"	120V	8.5W	>0.9	Y	55lm	65lm/W	3000K/4000K/5000K	RA >80	>50,000H
MQTL1070 6"	120V	13.5W	>0.9	Y	90lm	66lm/W	3000K/4000K/5000K	RA >80	>50,000H
MQTL1070 8"	120V	22W	>0.9	Y	270lm	93lm/W	3000K/4000K/5000K	RA >80	>50,000H

Features

- Life Time: > 50,000 hours
- Color Temperature: 3000K/4000K/5000K
- Aluminum housing, solid and durable, excellent heat dissipating effect




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
MQTL1020	5.00in	2.68in
MQTL1020	5.00in	2.68in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MQTL1020	120V	8.5W	>0.9	Y	55lm	65lm/W	3000K/4000K/5000K	RA -80	>50,000H
MQTL1020	120V	16.5W	>0.9	Y	70lm	67lm/W	3000K/4000K/5000K	RA -80	>50,000H

6"LED Downlight

Commercial Downlight




Features

- Life Time: >50,000 hours
- Color Temperature: 3000K/4000K/5000K
- Aluminum housing, solid and durable, excellent heat dissipating effect




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
MGL110-9	7.32in	3.00in
MGL110-9	7.32in	3.00in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MGL-019	120V	10.5W	>0.9	Y	650lm	62lm/W	3000K/4000K/5000K	RA>80	>50,000H
MGL-019	120V	18W	>0.9	Y	1200lm	67lm/W	3000K/4000K/5000K	RA>80	>50,000H

Features

- Life Time: >50,000 hours
- Color Temperature: 3000K/4000K/5000K
- Aluminum housing, solid and durable, excellent heat dissipating effect




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution




Item	Length	Height
MGL11027	9.13in	3.94in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MGL11027	70-277V	22W	>0.9	0-10V	1800lm	82lm/W	3000K/4000K/5000K	RA>80	>50,000H

Panel Light

ECO Panel Light

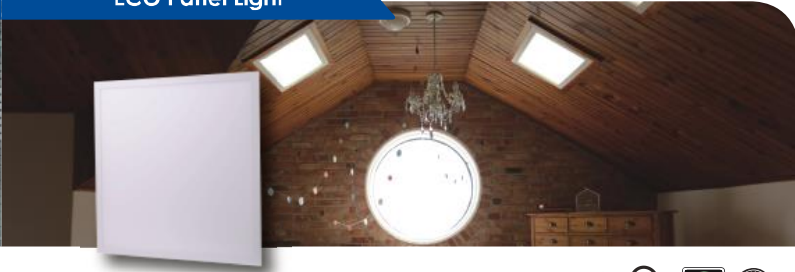


Features

- No UV or IR radiation.
- Mercury-free construction.
- Indirect lighting troffer design adds a distinct style to any office.
- Pmma+Seoul/Samsung.


Applications

- Commercial
- Hospitality
- Education
- Healthcare
- Retail
- Residential
- Conference Room

Light Distribution



Dimensions



Item	Length	Width	Height
M/QL1035 LE225W/22	23.82r	23.82r	0.43in
M/QL1035 LE240W/22	23.82r	23.82r	0.43r
M/QL1035 LE240W/14	23.82r	12.20r	0.43in
M/QL1035 LE240W/24	47.64r	12.20r	0.43r
M/QL1035 LE240W/24	47.64r	12.20r	0.43r

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MGL 035-LED25W/22	120-277V	25W	>0.9	0-10V	2629lm	103lm/W	3300/4000K/5000K	RA>80	>50,000h
MGL 035-LED40W/22	120-277V	40W	>0.9	0-10V	4200lm	103lm/W	3300/4000K/5000K	RA>80	>50,000h
MGL 035-LED40W/14	120-277V	40W	>0.9	0-10V	4200lm	103lm/W	3300/4000K/5000K	RA>80	>50,000h
M/QL1035-LED40W/24	120-277V	40W	>0.9	0-10V	4200lm	103lm/W	3300/4000K/5000K	RA>80	>50,000h
M/QL1035-LED40W/24	120-277V	60W	>0.9	0-10V	6300lm	103lm/W	3300/4000K/5000K	RA>80	>50,000h




Features

- No UV or IR radiation.
- Mercury-free construction.
- Indirect lighting troffer design adds a distinct style to any office.
- MS+Sanan/Bridge.


Applications

- Commercial
- Hospitality
- Education
- Healthcare
- Retail
- Residential
- Conference Room

Light Distribution



Dimensions



Item	Length	Width	Height
MGL1036 LE225W/22	23.82r	23.82r	0.43in
MGL1036 LE240W/22	23.82r	23.82r	0.43in
MGL1036 LE240W/14	23.82r	12.20r	0.43in
MGL1036 LE240W/24	47.64r	12.20r	0.43in
MGL1036 LE240W/24	47.64r	12.20r	0.43in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MGL 1036-LED25W/22	120-277V	25W	>0.9	0-10V	2629lm	103lm/W	3300/4000K/5000K	RA>80	>35,000h
MGL 1036-LED40W/22	120-277V	40W	>0.9	0-10V	4200lm	103lm/W	3300/4000K/5000K	RA>80	>35,000h
MGL 1036-LED40W/14	120-277V	40W	>0.9	0-10V	4200lm	103lm/W	3300/4000K/5000K	RA>80	>35,000h
M/QL1036-LED40W/24	120-277V	40W	>0.9	0-10V	4200lm	103lm/W	3300/4000K/5000K	RA>80	>35,000h
M/QL1036-LED40W/24	120-277V	60W	>0.9	0-10V	6300lm	103lm/W	3300/4000K/5000K	RA>80	>35,000h



Troffer Fixtures

Architectural Flush Mount




Features

- No UV or IR radiation.
- Mercury-free construction.
- Indirect lighting troffer design adds a distinct style to any office.


Applications

- Commercial
- Hospitality
- Education
- Healthcare
- Retail
- Residential
- Conference Room

Light Distribution



Dimensions



Item	Length	Width	Height
M/QL1C23-LE>36W/22	33.83in	23.82in	3.94in
M/QL1C23-1F>43W/22	33.83in	23.82in	3.94in
M/QL1C23-LE>36W/14	12.09in	47.84in	3.94in
M/QL1C23-LE>43W/24	33.83in	47.84in	3.94in
M/QL1C23-LE>63W/24	33.83in	47.84in	3.94in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
M/QL1C23-LE>36W/22	120-277V	36W	>0.9	0-10V	4000lm	111lm/W	3000/4000K/5000K	RA>80	>50,000h
M/QL1C23-LED43W/22	120-277V	40W	>0.9	0-10V	4600lm	110lm/W	3000/4000K/5000K	RA>80	>50,000h
M/QL1C23-LED136W/14	120-277V	36W	>0.9	0-10V	4000lm	111lm/W	3000/4000K/5000K	RA>80	>50,000h
M/QL1C23-LED43W/24	120-277V	40W	>0.9	0-10V	4600lm	110lm/W	3000/4000K/5000K	RA>80	>50,000h
M/QL1C23-LED63W/24	120-277V	60W	>0.9	0-10V	6600lm	110lm/W	3000/4000K/5000K	RA>80	>50,000h


Features

- No UV or IR radiation.
- Mercury-free construction.
- Color Rendering Index: >80.
- Suitable for damp locations.


Applications

- Commercial
- Hospitality
- Education
- Healthcare
- Residential
- Retail
- Conference Room

Light Distribution



Dimensions



Item	Length	Height
MXL-024-2'	2.03m	3.30in
MXL-024-4'	4.06m	3.80in
MXL-024-6'	6.02m	3.80in
MXL-024-8'	8.03m	3.80in
MXL-024-10'	10.03m	3.80in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL1024-12'	120V	15W	>0.9	✓	630lm	101lm/W	3000/4000K/5000K	RA>80	>50,000h
MXL1024-14'	120V	21W	>0.9	✓	930lm	111lm/W	3000/4000K/5000K	RA>80	>50,000h
MXL1024-16'	120V	15W	>0.9	✓	300lm	111lm/W	3000/4000K/5000K	RA>80	>50,000h
MXL1024-18'	120V	24W	>0.9	✓	730lm	111lm/W	3000/4000K/5000K	RA>80	>50,000h
MXL1024-18'	120V	28W	>0.9	✓	2030lm	111lm/W	3000/4000K/5000K	RA>80	>50,000h

Glass Flush Mount

Slim Flush Mount




Features

- No UV or IR radiation.
- Mercury-free construction.
- Color Rendering Index: ≥ 80 .
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
MXL1039N	2.75in	4.76in
MXL1039B	2.75in	4.76in
MXL1039W	12.75in	4.76in
MYL1039G	2.75in	4.76in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL1039N	120V	18W	NA	Y	1300lm	72lm/W	3000K/4000K/5000K	RA > 90	> 50,000H
MXL1039B	120V	18W	NA	Y	1300lm	72lm/W	3000K/4000K/5000K	RA > 90	> 50,000H
MXL1039W	120V	18W	NA	Y	1300lm	72lm/W	3000K/4000K/5000K	RA > 90	> 50,000H
MYL1039G	120V	18W	NA	Y	1300lm	72lm/W	3000K/4000K/5000K	RA > 90	> 50,000H

Features

- No UV or IR radiation.
- Mercury-free construction.
- Color Rendering Index: ≥ 80 .
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
MXL3239	15.00in	1.00in
MXL3240	13.00in	1.00in
MXL3241	11.00in	1.00in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL3039	120V	24W	>0.9	Y	1680lm	70 lm/W	4000K	RA > 80	> 50,000H
MXL3040	120V	15W	>0.9	Y	1050lm	70 lm/W	4000K	RA > 80	> 50,000H
MXL3041	120V	12W	>0.9	Y	840 lm	70 lm/W	4000K	RA > 80	> 50,000H

Flush Mount

Round Flush Mount




Features

- No UV or IR radiation.
- Mercury-free construction.
- Color Rendering Index : ≥80
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
NXL3325	11.00in	3.00in
NXL3324	11.00in	3.00in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
NXL3325	220V	10W	>0.9	Y	650lm	65lm/W	3000K/4000K/5000K	RA >80	>50,000H
NXL3324	220V	15W	>0.9	Y	950lm	63lm/W	3000K/4000K/5000K	RA >80	>50,000H

Features

- No UV or IR radiation.
- Mercury-free construction.
- Color Rendering Index : ≥80
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
NXL3328	13.68in	3.72in
NXL3329	11.00in	2.81in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
NXL3328	120V	24W	>0.9	Y	1600lm	67lm/W	3000K/4000K/5000K	RA >80	>50,000H
NXL3329	120V	16W	>0.9	Y	1100lm	69lm/W	3000K/4000K/5000K	RA >80	>50,000H

Disc Flush Mount

Square Flush Mount




Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for wet locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
MXL3030	7.75in	1.75in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MX 3030	120V	9.3W	>0.9	Y	670lm	67lm/W	3000K/4000K/5000K	RA >80	>50,000H

Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Height
MXL3026	13.68in	3.12in
MXL3027	11.00in	2.87in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL3026	120V	24W	>0.9	Y	1,600lm	67lm/W	3000K/4000K/5000K	RA >80	>50,000H
MXL3027	120V	16W	>0.9	Y	1,000lm	69lm/W	3000K/4000K/5000K	RA >80	>50,000H



Flush Mount




Vanity Light

Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Retail
- Conference Room
- Hospitality
- Healthcare
- Residential

Light Distribution



Item	Length	Height
MLL1015	8.35in	3.70in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MLL1015	120V	10.5W	>0.9	Y	800lm	76lm/W	3000K/4000K/5000K	RA>80	>50,000h

Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Width	Height
MLV206	29.62in	9.00in	8.30in
MLV208	21.75in	9.00in	8.30in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MLV206	120V	34W	>0.9	Y	1300lm	35lm/W	3000K/4000K/5000K	RA>80	>35,000H
MLV208	120V	26W	>0.9	Y	950lm	37lm/W	3000K/4000K/5000K	RA>80	>35,000H

Undercabinet Light

Strip Light




Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Conference Room
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Width	Height
MXL2012	18.20in	3.33in	1.90in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL2012	120V	12W	>0.9	N	850lm	71lm/W	3000K/4000K/5000K	RA>80	>50,000H

Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.




Dimensions



Applications

- Commercial
- Education
- Residential
- Healthcare
- Hospitality
- Retail

Light Distribution



Item	Length	Width	Height
MXL2053-LED20/14	24.02in	3.54in	2.20in
MXL2053-LED40/24	48.03in	3.54in	2.20in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL2053-LED20/14	120-277V	20W	>0.9	0-10V	2100lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H
MXL2053-LED40/24	120-277V	40W	>0.9	0-10V	4200lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H

Strip Light




Features

- Energy efficient.
- Life Time, last up to 50,000 hours.
- Metal housing construction.
- Linkable up to 8 fixtures.
- Suitable for damp locations.


Applications

- Commercial
- Education
- Retail
- Conference Room
- Hospitality
- Healthcare
- Residential

Light Distribution



Dimensions



Item	Length	Width	Height
MXL2017-LED10/12	24.02in	2.23in	1.77in
MXL2017-LED20/14	48.03in	2.20in	1.77in
MXL2017-LED20/22	23.35in	3.54in	1.69in
MXL2017-LED20/24	47.39in	3.54in	1.69in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL2017-LED10/12	120-277V	10W	>0.9	0-10V	1030lm	103lm/W	3000K/4000K/5000K	RA>80	>50,000H
MXL2017-LED20/14	120-277V	20W	>0.9	0-10V	2100lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H
MXL2017-LED20/22	120-277V	20W	>0.9	0-10V	2100lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H
MXL2017-LED20/24	120-277V	40W	>0.9	0-10V	4200lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H

Strip Light




Features

- Energy efficient.
- Life Time, last up to 50,000 hours.
- Metal housing construction.
- Linkable up to 8 fixtures.
- Suitable for damp locations.


Applications

- Commercial
- Education
- Retail
- Conference Room
- Hospitality
- Healthcare
- Residential

Light Distribution



Dimensions



Item	Length	Width	Height
MXL2030-LED10/12	24.02in	2.20in	1.77in
MXL2030-LED20/14	48.03in	2.20in	1.77in
MXL2030-LED20/22	23.35in	3.54in	1.69in
MXL2030-LED20/24	47.37in	3.54in	1.69in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL2030-LED10/12	120-277V	10W	>0.9	N	1030lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H
MXL2030-LED20/14	120-277V	20W	>0.9	N	2100lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H
MXL2030-LED20/22	120-277V	20W	>0.9	N	2100lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H
MXL2030-LED20/24	120-277V	40W	>0.9	N	4200lm	105lm/W	3000K/4000K/5000K	RA>80	>50,000H

Strip Light

Wrap Light




Features

- Energy efficient.
- Life time, last up to 50,000 hours.
- Metal housing construction.
- Linkable up to 8 fixtures.
- Suitable for damp locations.
- Optional : emergency/sensor.


Applications

- Commercial
- Hospitality
- Education
- Healthcare
- Retail
- Residential
- Conference Room

Light Distribution



Dimensions



Item	Length	Width	Height
MXL2047-20W	24.03in	2.36in	2.59in
MXL2047-40W	47.64in	2.36in	2.59in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL2047-20W-2	120-277V	20W	>0.9	0-10V	2500lm	125lm/W	3000K/4000K/5000K	RA>80	>50,000H
MXL2047-40W-4	120-277V	40W	>0.9	0-10V	5000lm	125lm/W	3000K/4000K/5000K	RA>80	>50,000H


Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.


Applications

- Residential
- Commercial
- Education
- Retail
- Healthcare
- Hospitality
- Conference Room

Light Distribution



Dimensions



Item	Length	Width	Height
MXL2201-48W	48.19in	6.81in	2.3in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL2201-48W	120-277V	48W	>0.9	N	5340lm	119lm/W	3000K/4000K/5000K	RA>80	>50,000H



Wrap Light



Wrap Light

Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.




Dimensions



Applications

- Residential
- Commercial
- Education
- Retail
- Healthcare
- Hospitality
- Conference Room

Light Distribution



Item	Length	Width	Height
MXL2002	49.49in	5.59in	2.32in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL2002	120/277V	40W	>0.9	h	4200lm	103lm/W	3000K/4000K/5000K	RA>80	>50,000h

Features

- Wide area lighting beam angle.
- No UV or IR radiation.
- Mercury-free construction.
- Completely sealed lens and housing for wet location installation.




Dimensions



Applications

- Residential
- Commercial
- Education
- Retail
- Healthcare
- Hospitality
- Conference Room

Light Distribution



Item	Length	Width	Height
MXL2009	49.37in	9.53in	2.56in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MXL2009	120/277V	40W	>0.9	0-10V	4200lm	103lm/W	3000K/4000K/5000K	RA>80	>50,000h

Wrap Light

Shop Light




Features

- Built-in on/off pull chain.
- Energy efficient.
- Metal housing construction.
- White painted finish.
- Suitable for damp locations.
- Grounded plug and cord included.
- Mounting chain and hooks included.




Dimensions



Applications

- Residential
- Commercial
- Education
- Retail
- Healthcare
- Hospitality
- Conference Room

Light Distribution



Item	Length	Width	Height
MXL2013-LE204W	24.25in	6.33in	2.36in
MXL2013-LE348W	45.04in	6.33in	2.36in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life Time
MXL2013-LED24W	120V	24W	>0.9	N	2300lm	83lm/W	3000K/4000K/5000K	RA>80	>50,000-
MXL2013-LED348W	120V	48W	>0.9	N	4300lm	83lm/W	3000K/4000K/5000K	RA>80	>50,000-

Features

- Built-in on/off pull chain.
- Energy efficient.
- Metal housing construction.
- White painted finish.
- Suitable for damp locations.
- Grounded plug and cord included.
- Mounting chain and hooks included.




Dimensions



Applications

- Residential
- Commercial
- Education
- Retail
- Healthcare
- Hospitality
- Conference Room


Light Distribution



Item	Length	Width	Height
MX3001-48W	48.25in	4.50in	2.50in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life Time
MX3001-48W	120V	48W	>0.9	N	4000lm	83lm/W	4000K	RA>80	>50,000-

Vapor Tight

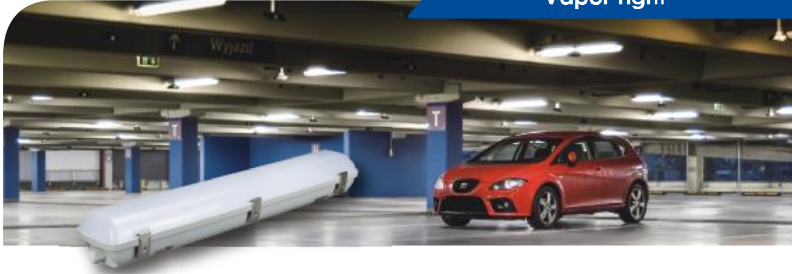


Features

- Wide area lighting beam angle.
- No UV or IR radiation.
- Mercury-free construction.
- Completely sealed lens and housing for wet location installation.



Dimensions




Can substitute for

Applications

- Commercial
- Education
- Healthcare
- Outdoor

Light Distribution




Item	Length	Width	Height
G-AL1004-LED10	25.79in	3.50in	3.62in
GWL1004-LED210	25.79in	3.50in	3.62in
G-AL1004-LED20	49.80in	3.50in	3.62in
GWL1004-LED220	49.80in	3.50in	3.62in
GWL1004-LED225	49.80in	3.50in	3.62in

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
GW-1004-LED-0	120-277V	10W	>0.9	N	1'53lm	1'5lm ² /W	3000K/4000K/5000K	RA>80	>50,000h
G-AL1004-LED210	120-277V	20W	>0.9	N	2900lm	1'5lm ² /W	3000K/4000K/5000K	RA>80	>50,000h
GW-1004-LED20	120-277V	20W	>0.9	N	2900lm	1'5lm ² /W	3000K/4000K/5000K	RA>80	>50,000h
G-AL1004-LED220	120-277V	40W	>0.9	N	4600lm	1'5lm ² /W	3000K/4000K/5000K	RA>80	>50,000h
G-AL1004-LED225	120-277V	50W	>0.9	N	5500lm	1'0lm ² /W	3000K/4000K/5000K	RA>80	>50,000h

Work Light



Dimensions



Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.
- Dual voltage model provides a portable profile with convenient 12V dc alternate input.

Applications

- Retail
- Residential
- Outdoor
- Family

Item	Length	Width	Height
WPL1010	6.82in	7.80in	8.50in


Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
WPL1010	120/2VDC	13W	>0.9	N	700lm	70lm ² /W	4000K	RA>80	>35,000h

Work Light

Work Light



Dimensions



Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.

Applications

- Retail
- Outdoor
- Residential
- Family

Item	Length	Width	Height
MPL 002	9,10r	8,10r	12,06r
MPL 006	9,10r	8,10r	12,06r

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MPL1005	120V	12W	>0,9	N	1000lm	57lm/W	4000K	RA>80	~35,000H
MPL1006	120V	30W	>0,9	N	2000lm	57lm/W	4000K	RA>80	~35,000H




Features

- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.

Applications

- Retail
- Outdoor
- Residential
- Family

Dimensions




Item	Length	Width	Height
MPL1007	9,13r	8,10r	2,05r

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MPL 007	120V	60W	~0,9	N	4000lm	66lm/W	3000K/4000K/5000K	RA>80	~35,000H

Work Light



Dimensions



Item	Length	Width	Height
MP-L1009	8.70in	8.73in	9.80in

Features


- No UV or IR radiation.
- Mercury-free construction.
- Suitable for damp locations.
- Dual voltage model provides a portable profile with convenient 12V dc alternate input.

Applications


- Retail
- Residential
- Outdoor
- Family

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MP-L1009	120V	40W	>0.9	N	3000lm	73 lm/W	4000K	RA>80	>35,000h

Work Light

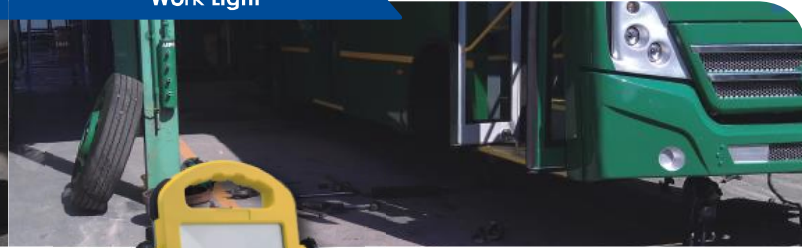

Dimensions



Item	Length	Width	Height
MP-L1020	9.92in	7.01in	10.91in

Features

- Life time: >30,000 hours.
- Color Temperature: 4000K.
- Color Rendering Index: >=80.
- It needs 6 hours to be fully charged, It needs 12 hours to be fully charged if discharge and charge at the same time.
- Full brightness: last 4 hours.
- Half brightness: last 8 hours.
- Suitable for damp locations.

Applications

- Retail
- Residential
- Outdoor
- Family

Item	Voltage	Wattage	PF	Dimming	Lumen Output	Efficacy	CCT	CRI	Life time
MP-L1020	120V	28W	>0.7	N	1500lm	53 lm/W	4000K	RA>80	>35,000h